





Datasheet

Echo 137 LED Recessed downlight

1001.1908

24.1M18DC.00

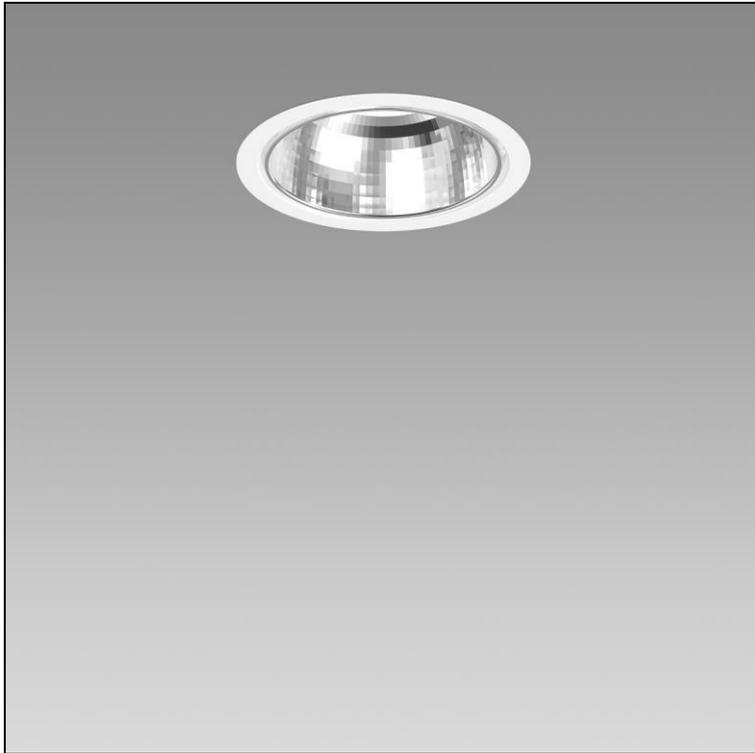

System power	14 W
Source of light	LED (Light Emitting Diode)
Colour temperature	3000 K
Luminaire flux	1400 lm
Ingress Protection	IP20 / IP44
Colour Rendering Index	CRI >90
UGR C0 4H/8H	18.2
UGR C90 4H/8H	18.2
Economic life-time	L80 (B50) 50'000h
Light control	DALI
Finish	white
Weight	1.156 kg

Recessed downlight Echo 137 LED with LED (Light Emitting Diode), system power: 14 W, luminous flux of luminaire 1400 lm, standby power 0.4 W, CRI >90, 3000 K, warm white, SDCM 3, L80 (B50) 50'000h, 230 V, direct light emission, housing in aluminium, with ceiling trim, white, with silver reflector, (M), medium beam, 60 °, operating unit included in delivery, DALI,

protection class I, ingress protection IP20 / IP44, glow wire test 850 °C, impact strength: IK 08
 $\varnothing = 152 \text{ mm}$, $DA\varnothing = 137 \text{ mm}$, $ET = 100 \text{ mm}$