
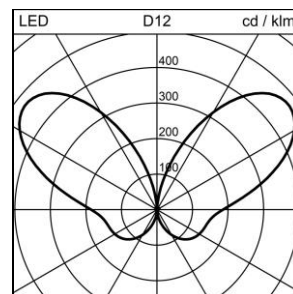
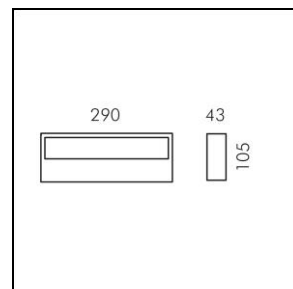


## Datasheet

### Look LED Wall mounted luminaire

1022.1154  
 S.7252N.14

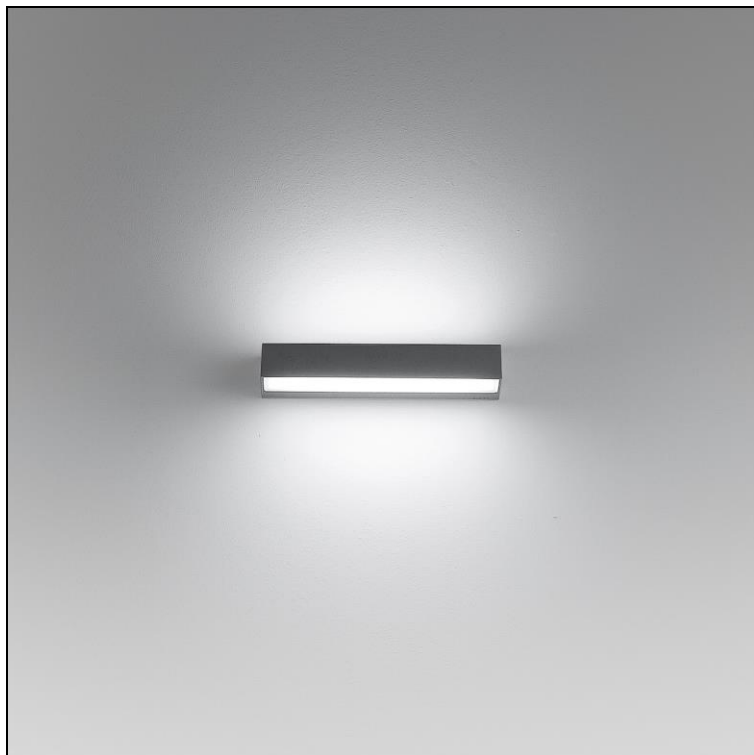

<b>System power</b>	19 W
<b>Source of light</b>	LED (Light Emitting Diode)
<b>Colour temperature</b>	4000 K
<b>Luminaire flux</b>	781 lm
<b>Ingress Protection</b>	IP65
<b>Colour Rendering Index</b>	CRI >90
<b>Economic life-time</b>	L70 (B20) 50'000h
<b>Light control</b>	ON/OFF
<b>Finish</b>	aluminium grey
<b>Weight</b>	0.5 kg

Wall mounted luminaire Look LED S.7252N.14 double emission, with LED (Light Emitting Diode) system power: 19 W, luminous flux of luminaire 781 lm, CRI >90, 4000 K, neutral white, SDCM 3, 230 V, direct light emission, housing in die-cast aluminium, aluminium grey, acid-etched toughened glass, 1 integral control gear, ON/OFF,

protection class I, ingress protection IP65, impact strength: IK 04  
 B = 290 mm, T = 105 mm, H = 43 mm