




Datasheet

Purelite C-LED Ceiling and wall mounted luminaire

1022.3772

58H3F212L3JC

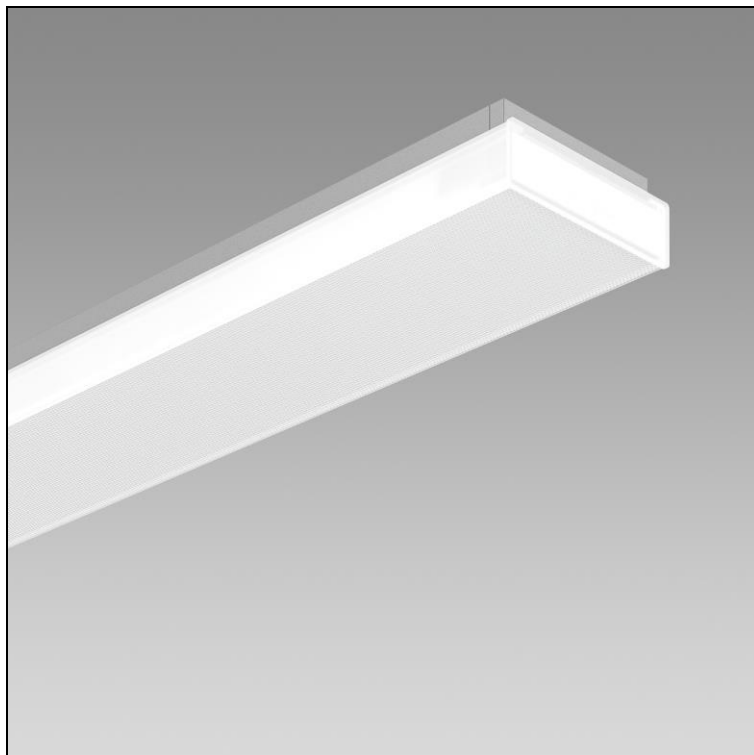

System power	30 W	<p>Ceiling and wall mounted luminaire Purelite C-LED with LED (Light Emitting Diode), system power: 30 W, luminous flux of luminaire 3100 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, max. 3000 cd/m², 230 V, omni-directional, incl. illumination of the ceiling, housing in aluminium, natural-colour anodised diffuser in synthetic material micro-prismatic CLD (Controlled Luminance Diffuser), 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0279), luminaire complies with the strict requirements for Minergie-certified luminaires (95 lm/W)</p> <p>protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08 L = 1231 mm, B = 90 mm, H = 35 mm</p>
Source of light	LED (Light Emitting Diode)	
Colour temperature	4000 K	
Luminaire flux	3100 lm	
Ingress Protection	IP20	
Colour Rendering Index	CRI >80	
UGR C0 4H/8H	18.9	
UGR C90 4H/8H	17.6	
Economic life-time	L80 (B10) 50'000h	
Light control	DALI	
Finish	natural-colour anodised	
Weight	2.294 kg	