




## Datasheet

### Traq Office C-LED System batten luminaire kit 2002.9915

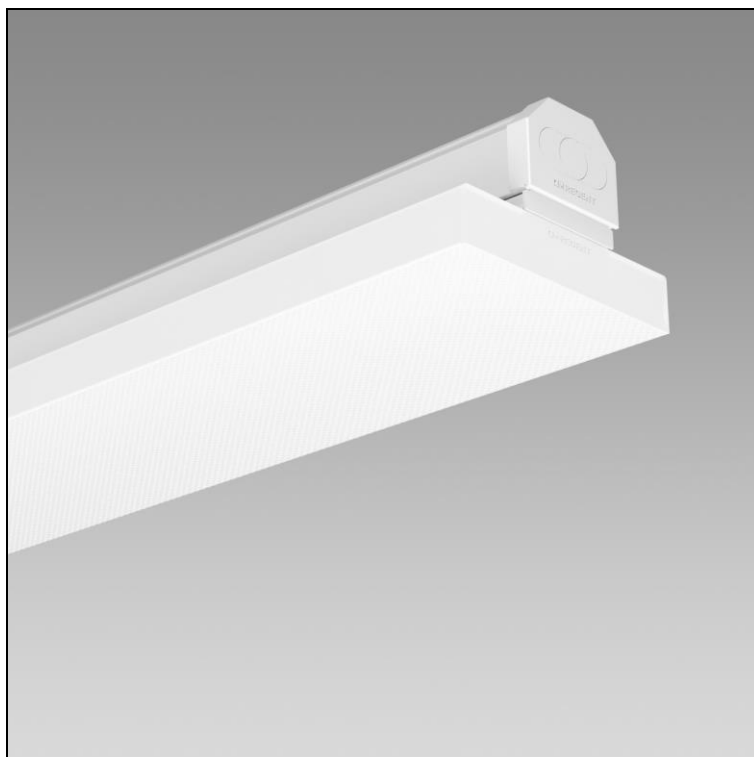

<b>System power</b>	39 W
<b>Source of light</b>	LED (Light Emitting Diode)
<b>Colour temperature</b>	4000 K
<b>Luminaire flux</b>	5200 lm
<b>Ingress Protection</b>	IP20
<b>Colour Rendering Index</b>	CRI >80
<b>Economic life-time</b>	L80 (B50) 50'000h
<b>Light control</b>	DALI
<b>Finish</b>	white

System batten luminaire kit Traq Office C-LED m1500, with LED (Light Emitting Diode), system power: 39 W, standby power 0.5 W, luminous flux of luminaire 5200 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B50) 50'000h, 230 V, direct-indirect light emission, gear tray made of aluminium white, powder coated, with diffuser polymethyl methacrylate (PMMA), micro-prismatic CLD (Controlled Luminance Diffuser), all-round beam, 1 integral control gear, DALI, with halogen-free wiring, Kit consisting of 1 mounting rail Traq Linear with with 2 end caps and 1 feed point, 1 system batten luminaire and 2 ceiling mount

protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 06 service temperature range 0°C to +35°C, L = 1481 mm, B = 150 mm, H = 96 mm