




Datasheet

Channel S LED Ceiling mounted luminaire

2003.3654

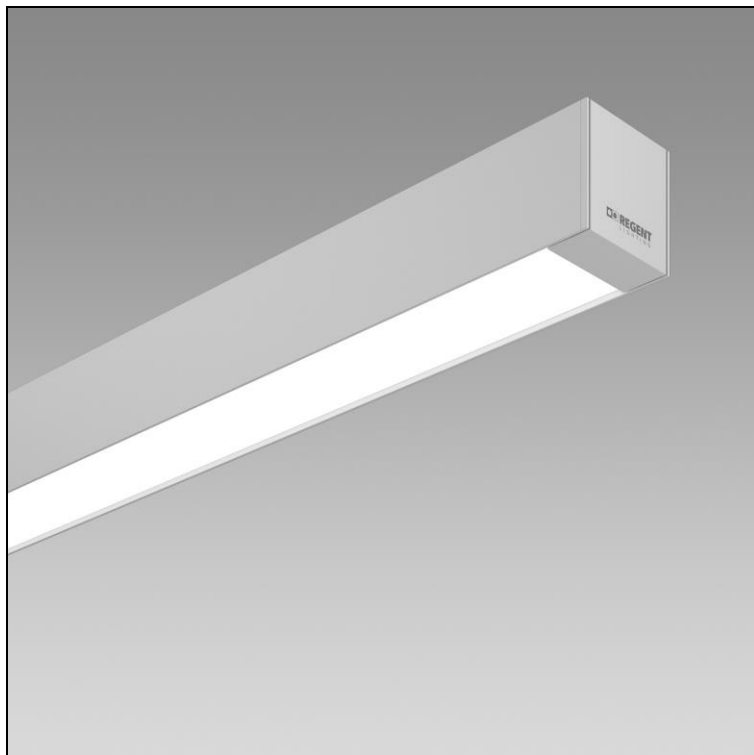

System power	13 W
Source of light	LED (Light Emitting Diode)
Colour temperature	4000 K
Luminaire flux	1100 lm
Ingress Protection	IP20
Colour Rendering Index	CRI >80
UGR C0 4H/8H	23.7
UGR C90 4H/8H	24.1
Economic life-time	L80 (B10) 50'000h
Light control	DALI
Finish	natural-colour anodised
Weight	1.47 kg

Ceiling mounted luminaire Channel S LED with LED (Light Emitting Diode), system power: 13 W, standby power 0.5 W, luminous flux of luminaire 1100 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, 230 V, direct light emission, support profile in aluminium natural-colour anodised, diffuser in polymethyl methacrylate (PMMA) opal, 1 integral control gear, DALI, with halogen-free wiring,

protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08

L = 650 mm, B = 65 mm, H = 61 mm