




Datasheet

Item LED Pendant luminaire

1004.6113

78W04L1579JC

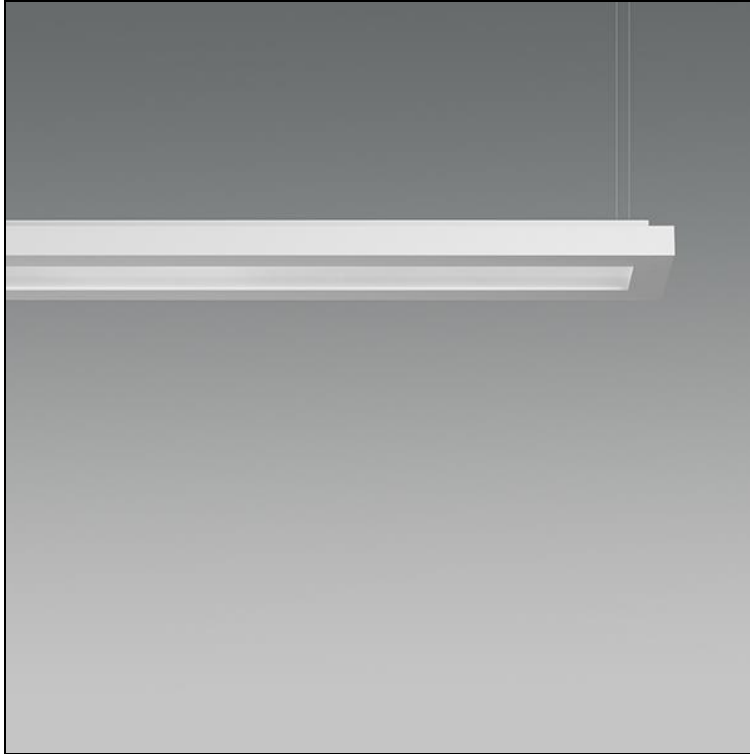

System power	65 W
Source of light	LED (Light Emitting Diode)
Colour temperature	4000 K
Luminaire flux	7900 lm
Ingress Protection	IP20
Colour Rendering Index	CRI >80
UGR C0 4H/8H	11.8
UGR C90 4H/8H	11.3
Economic life-time	L80 (B10) 50'000h
Light control	DALI
Finish	white
Weight	5.99 kg

Pendant luminaire Item LED L1, with LED (Light Emitting Diode), system power: 65 W, luminous flux of luminaire 7900 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, max. 3000 cd/m², 230 V, direct-indirect light emission, (23%/77%), single-part frame in aluminium, white, RAL 9016, -M (matt), with diffuser, micro-prismatic CLD (Controlled Luminance Diffuser), 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0303), luminaire complies with the strict requirements for Minergie-certified luminaires (102 lm/W)

protection class I, ingress protection IP20, glow wire test 850 °C, L = 1560 mm, B = 182 mm, H = 50 mm, p = 1575 mm