




# Datasheet

## Item LED Pendant luminaire

1004.6121

78W04L3079JC

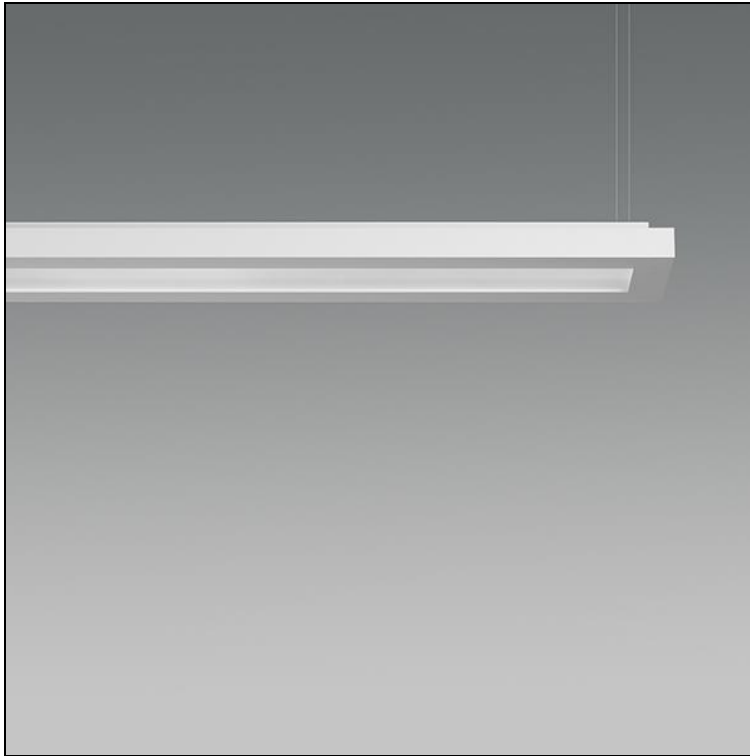

<b>System power</b>	130 W
<b>Source of light</b>	LED (Light Emitting Diode)
<b>Colour temperature</b>	4000 K
<b>Luminaire flux</b>	15800 lm
<b>Ingress Protection</b>	IP20
<b>Colour Rendering Index</b>	CRI >80
<b>UGR C0 4H/8H</b>	11.7
<b>UGR C90 4H/8H</b>	11.2
<b>Economic life-time</b>	L80 (B10) 50'000h
<b>Light control</b>	DALI
<b>Finish</b>	white
<b>Weight</b>	11.27 kg

Pendant luminaire Item LED with LED (Light Emitting Diode), system power: 130 W, luminous flux of luminaire 15800 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, max. 3000 cd/m<sup>2</sup>, 230 V, direct-indirect light emission, ( 23%/77% ), single-part frame in aluminium, white, RAL 9016, -M (matt), with diffuser, micro-prismatic CLD (Controlled Luminance Diffuser), 2 integral control gears, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0303), luminaire complies with the strict requirements for Minergie-certified luminaires (102 lm/W)

protection class I, ingress protection IP20, glow wire test 850 °C, L = 3040 mm, B = 182 mm, H = 50 mm, p = 1575 mm