




Datasheet

Solo Slim LED Surface-mounted luminaire

1021.7178

114W194L2DC

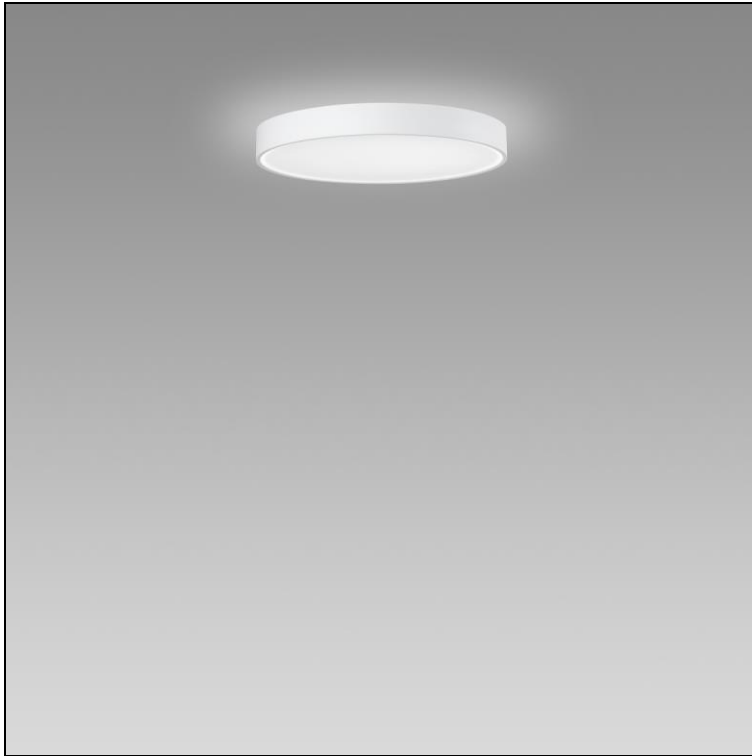

System power	19 W	<p>Ceiling and wall mounted luminaire Solo Slim LED with LED (Light Emitting Diode), system power: 19 W, luminous flux of luminaire 1980 lm, CRI >80, 3000 K, warm white, SDCM 3, L80 (B10) 50'000h, 230 V, direct-indirect light emission, frame in aluminium, white, neat shadow gap, diffuser in polymethyl methacrylate (PMMA) opal satin-frosted, 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0282), luminaire complies with the strict requirements for Minergie-certified luminaires (96 lm/W)</p> <p>protection class I, ingress protection IP40, glow wire test 650 °C, impact strength: IK 07 $\varnothing = 430 \text{ mm}$, $H = 81 \text{ mm}$</p>
Source of light	LED (Light Emitting Diode)	
Colour temperature	3000 K	
Luminaire flux	1980 lm	
Ingress Protection	IP40	
Colour Rendering Index	CRI >80	
UGR C0 4H/8H	21	
UGR C90 4H/8H	21	
Economic life-time	L80 (B10) 50'000h	
Light control	DALI	
Finish	white	
Weight	3.602 kg	