




Datasheet

Purelite D LED Ceiling and wall mounted luminaire

1022.3749

58H3D115L3JC

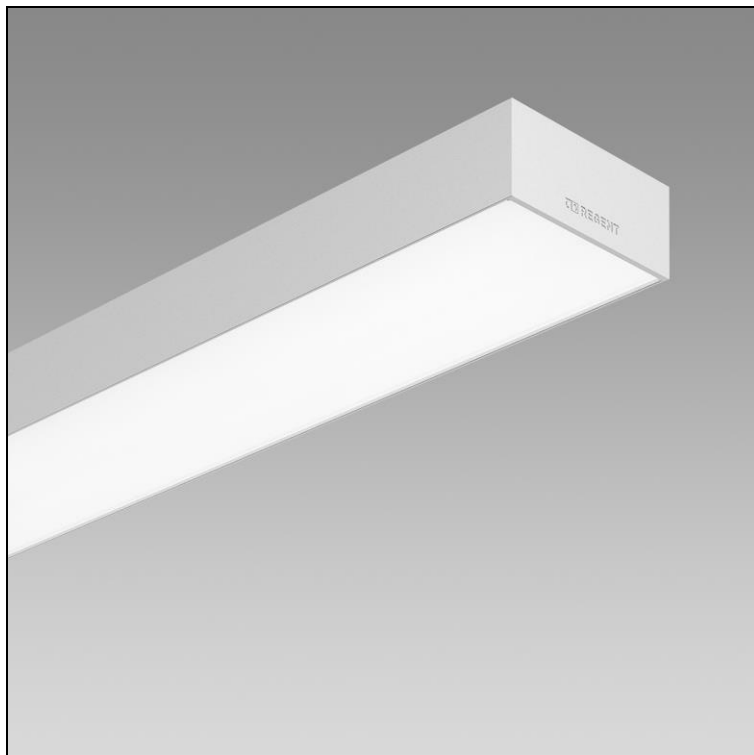

System power	37 W
Source of light	LED (Light Emitting Diode)
Colour temperature	4000 K
Luminaire flux	3750 lm
Ingress Protection	IP20
Colour Rendering Index	CRI >80
UGR C0 4H/8H	23.4
UGR C90 4H/8H	23.7
Economic life-time	L80 (B10) 50'000h
Light control	DALI
Finish	natural-colour anodised
Weight	3.018 kg

Ceiling and wall mounted luminaire Purelite D LED with LED (Light Emitting Diode), system power: 37 W, luminous flux of luminaire 3750 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, 230 V, direct light emission, housing in aluminium, natural-colour anodised diffuser in synthetic material opal, 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0280), luminaire complies with the strict requirements for Minergie-certified luminaires (87 lm/W)

protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08
 L = 1508 mm, B = 90 mm, H = 35 mm