



## Datasheet

### Tekla Luminaire

2000.6843

TEKLA DS INS CR110 LED1450-840 36 ALBR

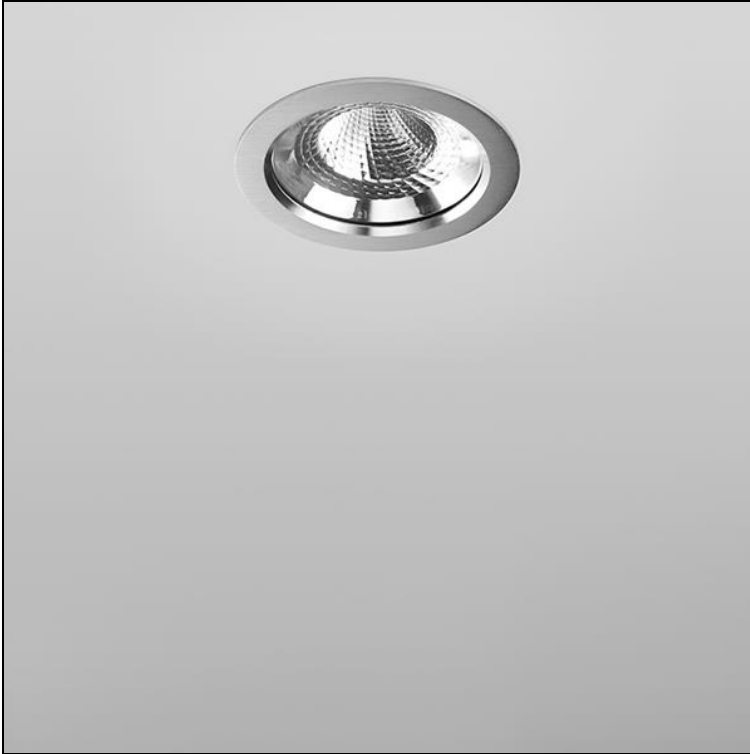

<b>System power</b>	16 W
<b>Luminaire flux</b>	1450 lm
<b>Colour temperature</b>	4000 K
<b>CRI</b>	CRI > 80
<b>Economic life-time</b>	L70 50'000 h
<b>Ingress Protection</b>	IP20
<b>Finish</b>	alu brushed
<b>Weight</b>	0.38 kg

Luminaire Tekla with LED, system power: 16 W, luminous flux of luminaire 1450 lm, colour rendering index CRI > 80, 4000 K, neutral white, colour tolerances SDCM 3, lifetime LED L70 50'000 h, 360 mA, direct light emission, housing in aluminium, with ceiling trim, alu brushed, 36°, without control gear,

protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 04  
 $\varnothing = 126$  mm,  $DA\varnothing = 110$  mm, ET = 100 mm, swivelling 2 x 20°