




# Datasheet

## Channel S LED Ceiling mounted luminaire 2003.3655

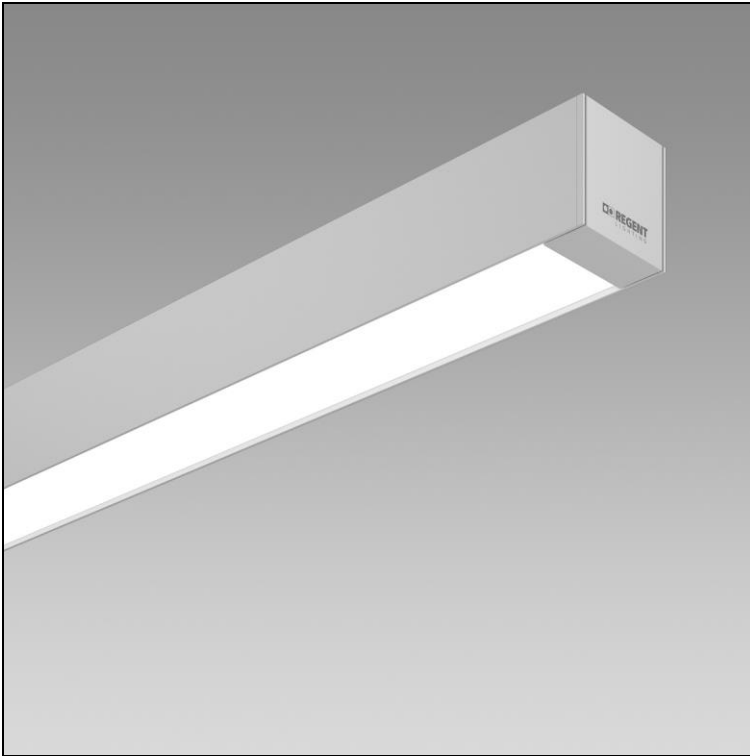

<b>System power</b>	22.5 W	<p>Ceiling mounted luminaire Channel S LED with LED (Light Emitting Diode), system power: 22.5 W, standby power 0.5 W, luminous flux of luminaire 2200 lm, CRI &gt;80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, 230 V, direct light emission, support profile in aluminium natural-colour anodised, diffuser in polymethyl methacrylate (PMMA) opal, 1 integral control gear, DALI, with halogen-free wiring,</p> <p>protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08 L = 1250 mm, B = 65 mm, H = 61 mm</p>
<b>Source of light</b>	LED (Light Emitting Diode)	
<b>Colour temperature</b>	4000 K	
<b>Luminaire flux</b>	2200 lm	
<b>Ingress Protection</b>	IP20	
<b>Colour Rendering Index</b>	CRI >80	
<b>UGR C0 4H/8H</b>	23.7	
<b>UGR C90 4H/8H</b>	24.1	
<b>Economic life-time</b>	L80 (B10) 50'000h	
<b>Light control</b>	DALI	
<b>Finish</b>	natural-colour anodised	
<b>Weight</b>	2.68 kg	