




Datasheet

Medra LED Recessed downlight 2003.4048

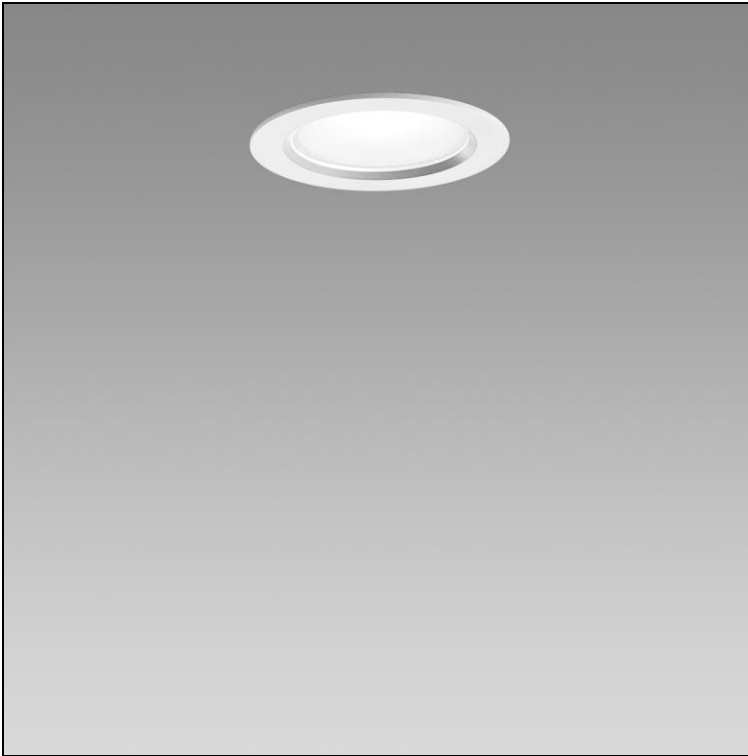

System power	8 W	<p>Recessed downlight Medra LED with LED (Light Emitting Diode), system power: 8 W, luminous flux of luminaire 700 lm, CRI >80, 3000 K, warm white, SDCM 3, L70 (B50) 50'000h, 230 V, direct light emission, housing in aluminium, with ceiling trim, white, similar to RAL 9016, wide beam, 110 °, operating unit included in delivery, ON/OFF, protection class II, ingress protection IP20 / IP44, glow wire test 850 °C, impact strength: IK 04 $\varnothing = 102$ mm, $DA\varnothing = 90$ mm, $ET = 47$ mm</p>
Source of light	LED (Light Emitting Diode)	
Colour temperature	3000 K	
Luminaire flux	700 lm	
Ingress Protection	IP20 / IP44	
Colour Rendering Index	CRI >80	
UGR C0 4H/8H	29.9	
UGR C90 4H/8H	29.9	
Economic life-time	L70 (B50) 50'000h	
Light control	ON/OFF	
Finish	white	