




# Datasheet

## Isigo 2 Ceiling and wall mounted luminaire

2008.3705

ISIGO2 RND CW300 LED2500-840 MLMC WH ONF MSEN

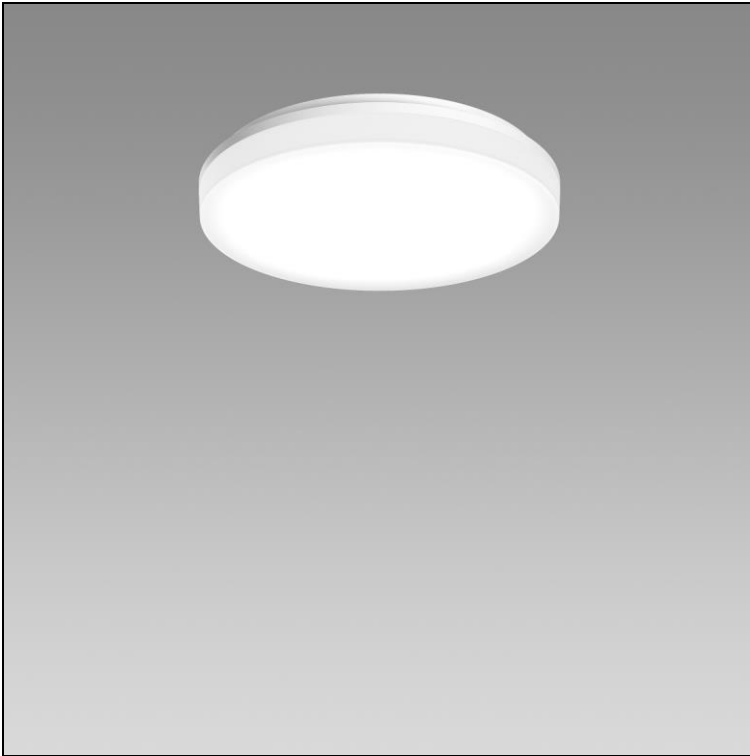

<b>System power</b>	20 W
<b>Luminaire flux</b>	2500 lm
<b>Multilumen</b>	2000/2500 lm
<b>Colour temperature</b>	4000 K
<b>Multicolor</b>	2700/3000/4000 K
<b>CRI</b>	CRI > 80
<b>UGR C0 4H/8H</b>	24
<b>UGR C90 4H/8H</b>	24
<b>Economic life-time</b>	L80 50'000 h
<b>Light control</b>	ON/OFF
<b>Ingress Protection</b>	IP54
<b>Finish</b>	white
<b>Weight</b>	1.65 kg

Ceiling and wall mounted luminaire Isigo 2 with LED, system power: 16 / 20 W, standby power 0 W, Multilumen 2000/2500 lm, colour rendering index CRI > 80, colour temperature can be set directly on the luminaire 2700/3000/4000 K, warm to neutral white, lifetime LED L80 50'000 h, colour tolerances SDCM 3, photobiological safety: the luminaire poses no danger (RG0), 230 V, direct light emission, housing in polycarbonate (PC), white, RAL 9016, with opal diffuser, 110°, 1 integral control gear, ON/OFF, with invisibly integrated HF-based motion detector and daylight control, detection through objects possible,

protection class II, ingress protection IP54, glow wire test 650 °C, impact strength: IK 10, this product contains a light source of energy efficiency class B and EPREL registration number: 1451560  
 $\varnothing = 300 \text{ mm}$ ,  $H = 55 \text{ mm}$