





Datasheet

Echo 137 LED Recessed downlight

1001.1900
24.1F18JC.00

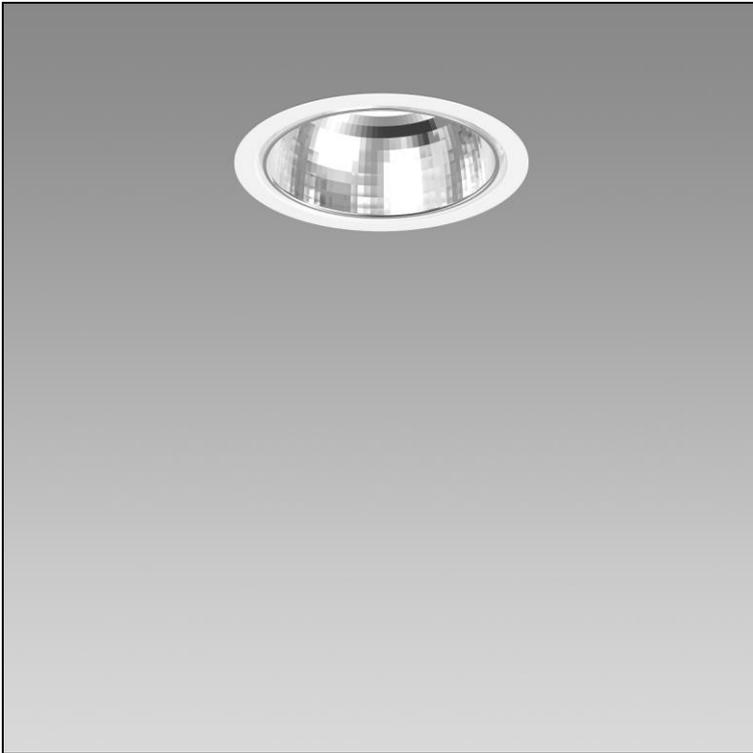

System power	14 W	<p>Recessed downlight Echo 137 LED with LED (Light Emitting Diode), system power: 14 W, luminous flux of luminaire 1450 lm, standby power 0.4 W, CRI >90, 4000 K, neutral white, SDCM 3, L80 (B50) 50'000h, 230 V, direct light emission, housing in aluminium, with ceiling trim, white, with silver reflector, (F), wide beam, 80 °, operating unit included in delivery, DALI,</p> <p>protection class I, ingress protection IP20 / IP44, glow wire test 850 °C, impact strength: IK 08 Ø = 152 mm, DAØ = 137 mm, ET = 100 mm</p>
Source of light	LED (Light Emitting Diode)	
Colour temperature	4000 K	
Luminaire flux	1450 lm	
Ingress Protection	IP20 / IP44	
Colour Rendering Index	CRI >90	
UGR C0 4H/8H	20.6	
UGR C90 4H/8H	20.6	
Economic life-time	L80 (B50) 50'000h	
Light control	DALI	
Finish	white	
Weight	0.934 kg	