




## Datasheet

### Slash 2 LED Surface-mounted luminaire

1003.0437

57H11L0613JC0

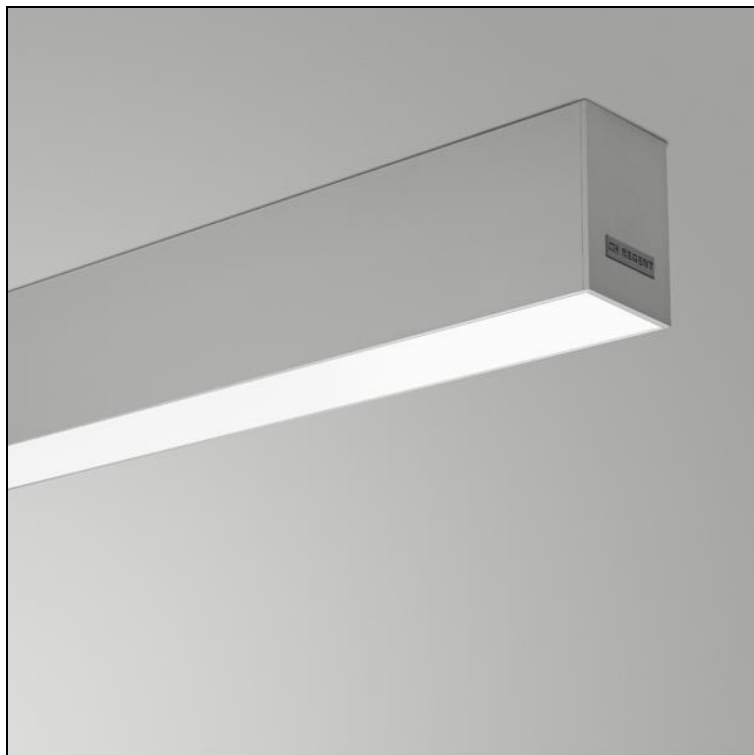

<b>System power</b>	11 W
<b>Source of light</b>	LED (Light Emitting Diode)
<b>Colour temperature</b>	4000 K
<b>Luminaire flux</b>	925 lm
<b>Ingress Protection</b>	IP20
<b>Colour Rendering Index</b>	CRI >80
<b>UGR C0 4H/8H</b>	24.1
<b>UGR C90 4H/8H</b>	24.4
<b>Economic life-time</b>	L80 (B10) 50'000h
<b>Light control</b>	DALI
<b>Finish</b>	natural-colour anodised
<b>Weight</b>	1.114 kg

Ceiling and wall mounted luminaire Slash 2 LED HPE (High Performance Efficiency), with LED (Light Emitting Diode), system power: 11 W, luminous flux of luminaire 925 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, 230 V, direct light emission, luminaire profile in aluminium, natural-colour anodised diffuser in polycarbonate (PC), APD (Added Performance Diffuser), OpalLed, 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0281), luminaire complies with the strict requirements for Minergie-certified luminaires (83 lm/W)

protection class I, ingress protection IP20, glow wire test 850 °C, L = 586 mm, B = 48 mm, H = 70 mm