




## Datasheet

### Channel S Up Boost LED Pendant luminaire

2001.0726

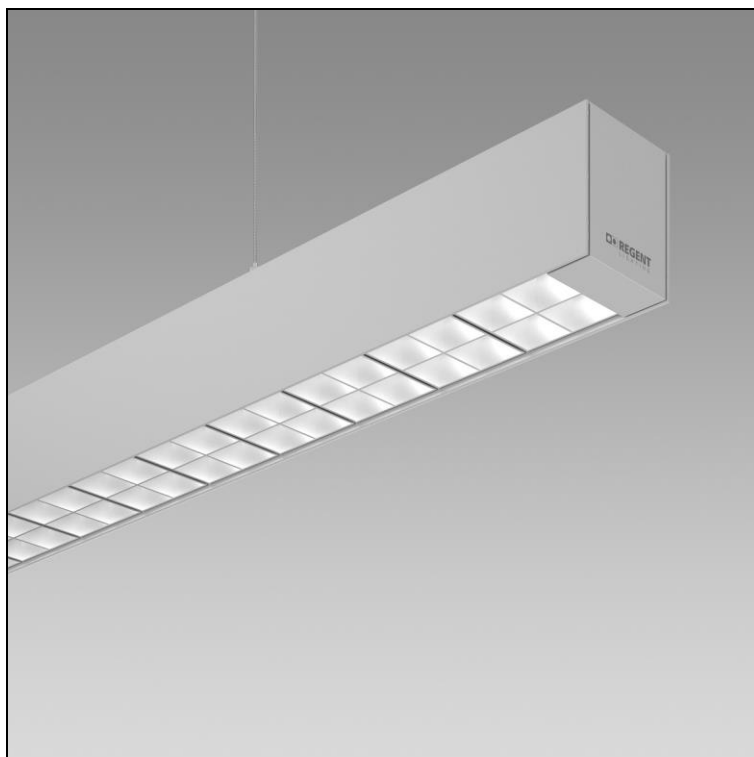

<b>System power</b>	49 W
<b>Source of light</b>	LED (Light Emitting Diode)
<b>Colour temperature</b>	4000 K
<b>Luminaire flux</b>	5300 lm
<b>Ingress Protection</b>	IP20
<b>Colour Rendering Index</b>	CRI >80
<b>UGR C0 4H/8H</b>	15.1
<b>UGR C90 4H/8H</b>	17.2
<b>Economic life-time</b>	L80 (B10) 50'000h
<b>Light control</b>	DALI
<b>Finish</b>	natural-colour anodised
<b>Weight</b>	3.18 kg

Pendant luminaire Channel S Up Boost LED with LED (Light Emitting Diode), system power: 49 W, luminous flux of luminaire 5300 lm, CRI >80, 4000 K, neutral white, SDCM 2, L80 (B10) 50'000h, 230 V, direct-indirect light emission, housing in aluminium, natural-colour anodised, with grid, 1 integral control gear, DALI, with halogen-free wiring, Boost optics with LED-specific optics and design. Office-compatible and glare-free according to EN 12464-1 (UGR < 19 and Lmax > 65° < 3000 cd/m²) without direct view of the LED thanks to satined primary optics and louvre optics in low gloss, with unrestricted light quality. Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0300), luminaire complies with the strict requirements for Minergie-certified luminaires (97 lm/W)

protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08, service temperature range -5°C to +30°C, L = 1250 mm, B = 65 mm, H = 71 mm, p = 1500 mm