




Datasheet

Echo 137 LED Recessed downlight

1001.1916
24.1M18JC.00

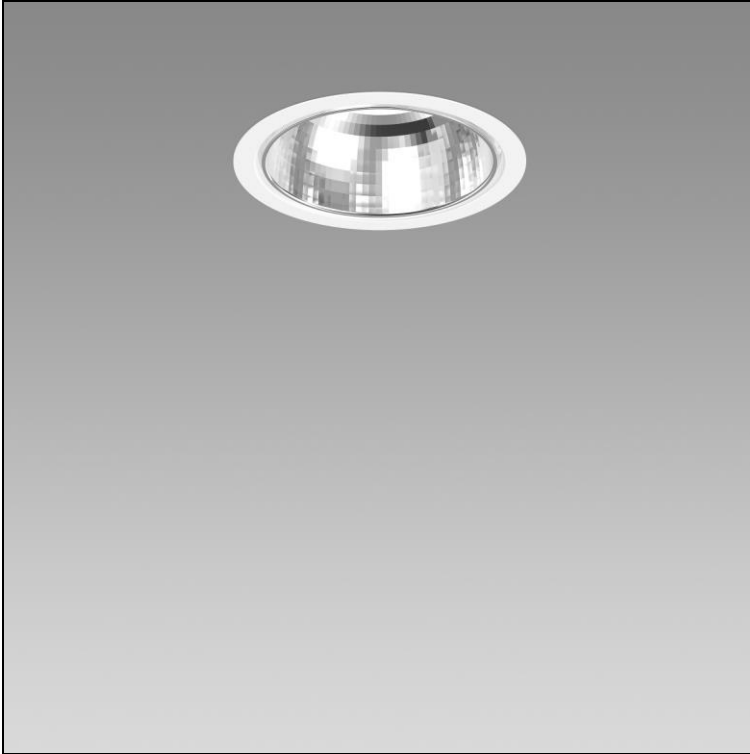

System power	14 W
Source of light	LED (Light Emitting Diode)
Colour temperature	4000 K
Luminaire flux	1450 lm
Ingress Protection	IP20 / IP44
Colour Rendering Index	CRI >90
UGR C0 4H/8H	18.3
UGR C90 4H/8H	18.3
Economic life-time	L80 (B50) 50'000h
Light control	DALI
Finish	white
Weight	0.936 kg

Recessed downlight Echo 137 LED with LED (Light Emitting Diode), system power: 14 W, luminous flux of luminaire 1450 lm, standby power 0.4 W, CRI >90, 4000 K, neutral white, SDCM 3, L80 (B50) 50'000h, 230 V, direct light emission, housing in aluminium, with ceiling trim, white, with silver reflector, (M), medium beam, 60 °, operating unit included in delivery, DALI,

protection class I, ingress protection IP20 / IP44, glow wire test 850 °C, impact strength: IK 08
Ø = 152 mm, DAØ = 137 mm, ET = 100 mm