




Datasheet

Slash 2 LED Surface-mounted luminaire

1003.0445

57H11L1227JC0

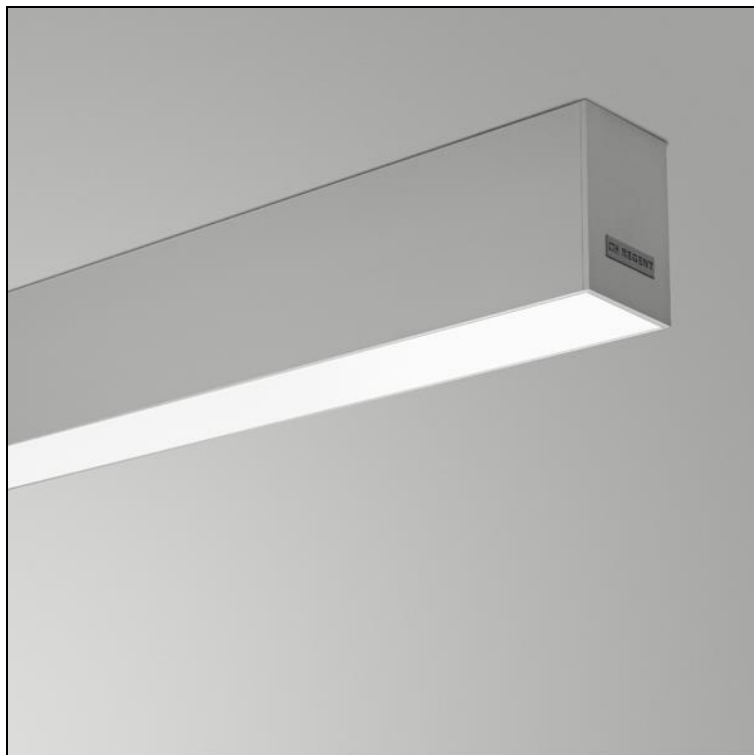

System power	21 W
Source of light	LED (Light Emitting Diode)
Colour temperature	4000 K
Luminaire flux	1850 lm
Ingress Protection	IP20
Colour Rendering Index	CRI >80
UGR C0 4H/8H	24.1
UGR C90 4H/8H	24.3
Economic life-time	L80 (B10) 50'000h
Light control	DALI
Finish	natural-colour anodised
Weight	2.01 kg

Ceiling and wall mounted luminaire Slash 2 LED HPE (High Performance Efficiency), with LED (Light Emitting Diode), system power: 21 W, luminous flux of luminaire 1850 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, 230 V, direct light emission, luminaire profile in aluminium, natural-colour anodised diffuser in polycarbonate (PC), APD (Added Performance Diffuser), OpalLed, 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0281), luminaire complies with the strict requirements for Minergie-certified luminaires (83 lm/W)

protection class I, ingress protection IP20, glow wire test 850 °C, L = 1186 mm, B = 48 mm, H = 70 mm