




## Datasheet

## Mini-Look LED Wall mounted luminaire 1018.2852 S.7202W.14

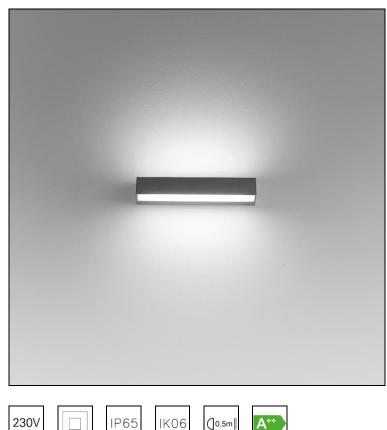





System power	12.5 W
Source of light	LED (Light Emitting Diode)
Colour temperature	3000 K
Luminaire flux	389 lm

IP65

CRI >90

ON/OFF

0.5 kg

L70 (B20) 50'000h

aluminium grey

**Ingress Protection** 

**Colour Rendering** 

**Economic life-time** 

Light control

Index

Finish

Weight

Wall mounted luminaire Mini-Look LED S.7202W.14 double emission, with LED (Light Emitting Diode) system power: 12.5 W, luminous flux of luminaire 389 Im, CRI >90, 3000 K, warm white, SDCM 3, 230 V, direct light emission, housing in die-cast aluminium, aluminium grey, acid-etched toughened glass, 1 integral control gear, ON/OFF,

protection class II, ingress protection IP65, impact strength: IK 06 B = 220 mm, T = 80 mm, H = 33 mm