




Datasheet

Purelite LED Ceiling and wall mounted luminaire

1022.3764

58H3F112L3JC

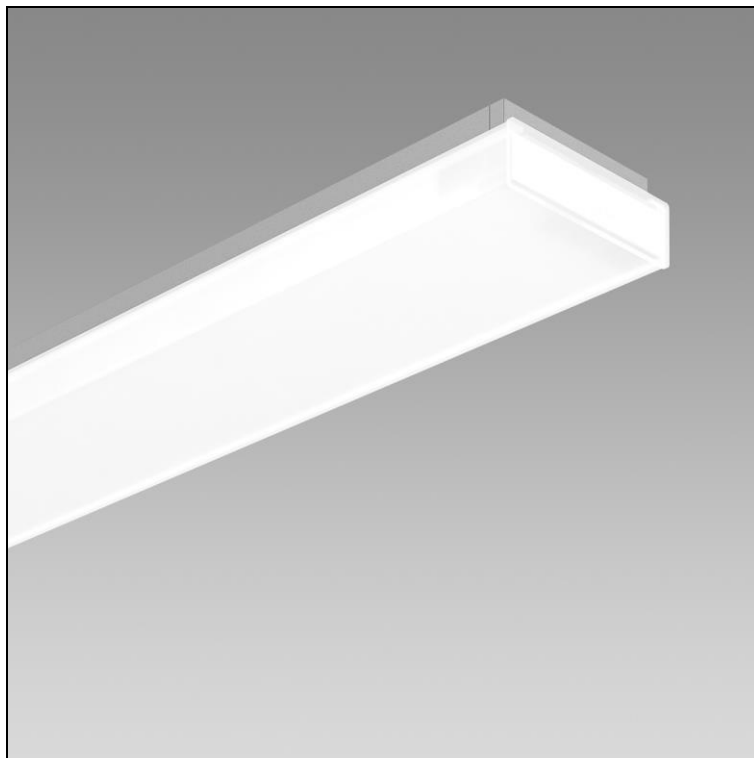

System power	30 W
Source of light	LED (Light Emitting Diode)
Colour temperature	4000 K
Luminaire flux	3330 lm
Ingress Protection	IP20
Colour Rendering Index	CRI >80
UGR C0 4H/8H	22.7
UGR C90 4H/8H	21.8
Economic life-time	L80 (B10) 50'000h
Light control	DALI
Finish	natural-colour anodised
Weight	2.294 kg

Ceiling and wall mounted luminaire Purelite LED with LED (Light Emitting Diode), system power: 30 W, luminous flux of luminaire 3330 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, 230 V, omni-directional, incl. illumination of the ceiling, housing in aluminium, natural-colour anodised diffuser in synthetic material opal, 1 integral control gear, DALI, Regent certified MINERGIE®-Modul luminaires S.A.F.E. 2019 (Re-0278), luminaire complies with the strict requirements for Minergie-certified luminaires (94 lm/W)

protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08
 L = 1231 mm, B = 90 mm, H = 35 mm