




Datasheet

Board LED Individual batten luminaire

1022.8406

N3486WL2DAU

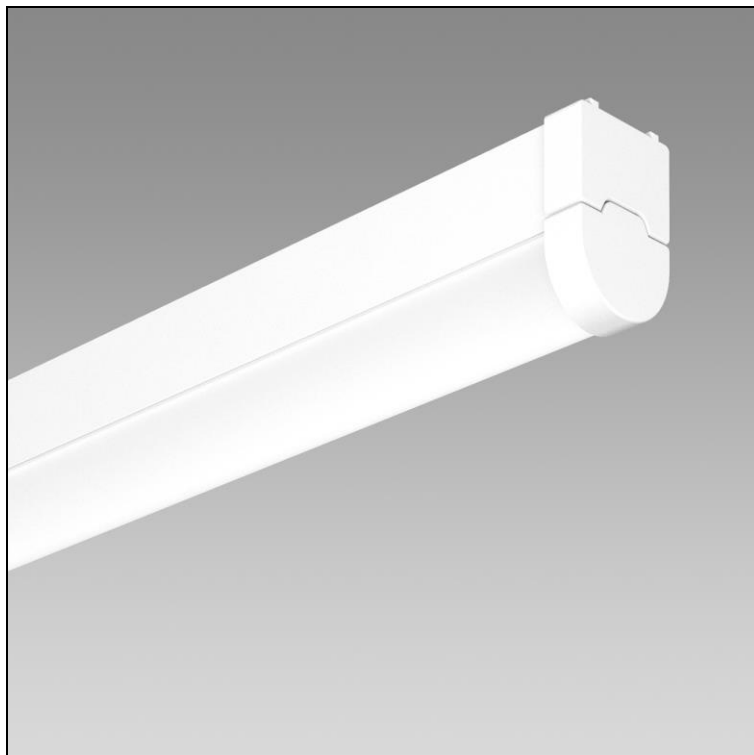

System power	39 W
Source of light	LED (Light Emitting Diode)
Colour temperature	3000 K
Luminaire flux	4200 lm
Ingress Protection	IP40
Colour Rendering Index	CRI >80
UGR C0 4H/8H	25.5
UGR C90 4H/8H	22.4
Economic life-time	L80 (B50) 50'000h
Light control	ON/OFF
Finish	white
Weight	2.4 kg

Individual batten luminaire Board LED m1500, with LED (Light Emitting Diode), system power: 39 W, luminous flux of luminaire 4200 lm, CRI >80, 3000 K, warm white, SDCM 3, L80 (B50) 50'000h, 230 V, housing in aluminium, white, diffuser in polycarbonate (PC) opal, 1 integral control gear, ON/OFF, with emergency unit, for non-maintained mode, with self-test, complete with battery pack, (burning life 1h),

protection class I, ingress protection IP40, glow wire test 850 °C, impact strength: IK 08, service temperature range 0°C to +35°C
 L = 1500 mm, B = 51 mm, H = 73 mm