




## Datasheet

### Channel S C-LED Ceiling mounted luminaire

2003.3631

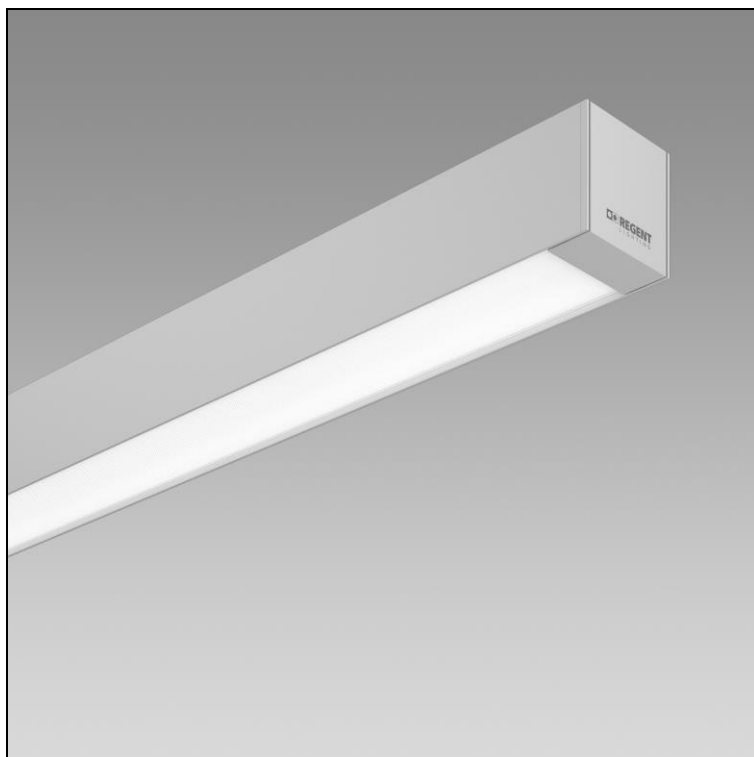

<b>System power</b>	25 W	Ceiling mounted luminaire Channel S C-LED with LED (Light Emitting Diode), system power: 25 W, standby power 0.5 W, luminous flux of luminaire 2250 lm, CRI >80, 4000 K, neutral white, SDCM 3, L80 (B10) 50'000h, max. 3000 cd/m <sup>2</sup> , 230 V, direct light emission, support profile in aluminium natural-colour anodised diffuser in polycarbonate (PC) satin, micro-prismatic CLD (Controlled Luminance Diffuser), 1 integral control gear, DALI, with halogen-free wiring, protection class I, ingress protection IP20, glow wire test 650 °C, impact strength: IK 08 service temperature range -5°C to +30°C, L = 1550 mm, B = 65 mm, H = 61 mm
<b>Source of light</b>	LED (Light Emitting Diode)	
<b>Colour temperature</b>	4000 K	
<b>Luminaire flux</b>	2250 lm	
<b>Ingress Protection</b>	IP20	
<b>Colour Rendering Index</b>	CRI >80	
<b>UGR C0 4H/8H</b>	18.4	
<b>UGR C90 4H/8H</b>	18.7	
<b>Economic life-time</b>	L80 (B10) 50'000h	
<b>Light control</b>	DALI	
<b>Finish</b>	natural-colour anodised	
<b>Weight</b>	3.18 kg	