




Datasheet

Isigo 2 Ceiling and wall mounted luminaire

2008.3703

ISIGO2 RND CW300 LED2500-840 MLMC WH ONF

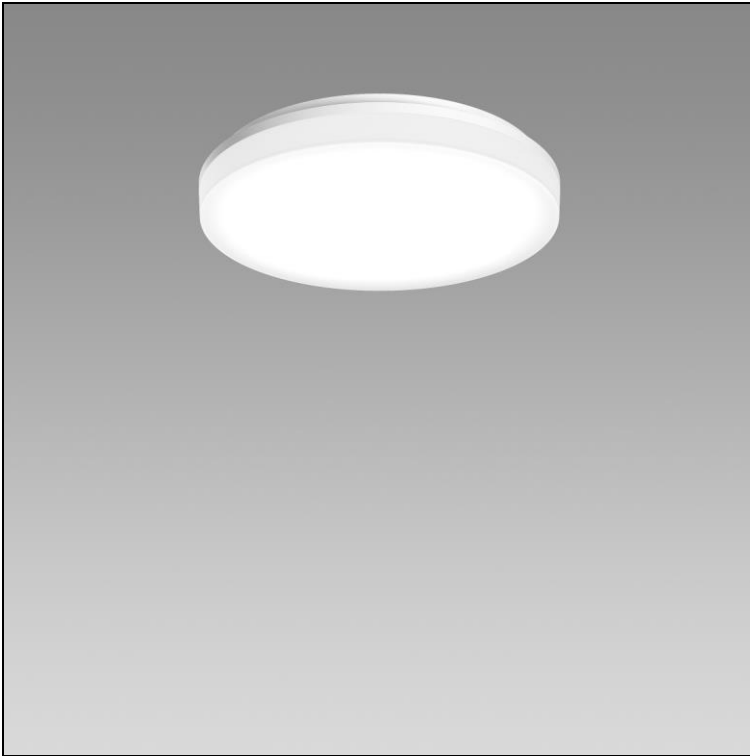

System power	20 W
Luminaire flux	2500 lm
Multilumen	2000/2500 lm
Colour temperature	4000 K
Multicolor	2700/3000/4000 K
CRI	CRI > 80
UGR C0 4H/8H	24
UGR C90 4H/8H	24
Economic life-time	L80 50'000 h
Light control	ON/OFF
Ingress Protection	IP54
Finish	white
Weight	1.3 kg

Ceiling and wall mounted luminaire Isigo 2 with LED, system power: 16 / 20 W, standby power 0 W, Multilumen 2000/2500 lm, colour rendering index CRI > 80, colour temperature can be set directly on the luminaire 2700/3000/4000 K, warm to neutral white, lifetime LED L80 50'000 h, colour tolerances SDCM 3, photobiological safety: the luminaire poses no danger (RG0), 230 V, direct light emission, housing in polycarbonate (PC), white, RAL 9016, with opal diffuser, 110°, 1 integral control gear, ON/OFF,

protection class II, ingress protection IP54, glow wire test 650 °C, impact strength: IK 10, this product contains a light source of energy efficiency class B and EPREL registration number: 1451560
 $\varnothing = 300 \text{ mm}$, $H = 55 \text{ mm}$